

Hewlett Packard
Enterprise

HPE Slingshot Monitoring Software: Actionable Insights for HPC and AI Systems

Sahil Patel, *Technical Product Manager, HPE*
CUG 2025

Scan the QR code to access the frequent Q&A'.

Additionally includes HPE Slingshot AIOps resources and contact details for the Telemetry-focused members of Slingshot Product Management and the Development team.



Agenda

Introduction

Overview of Slingshot Telemetry & More

HPE Slingshot Monitoring Software Overview

Key Features & Capabilities

Summary & Q&A



You've got Slingshot. But are you leveraging its full power?

Awareness is power. Most systems aren't using what's already available.

Deeper Switch Insights:

Port Conditions
ASIC Errors

Evolved HPCM Monitoring:

Unified features across releases
System-aware Data


New Unified Interface:

Easier
Interactive
Action-focused

Your systems are capable of much more, lets unlock that value.



Slingshot Monitoring Software Telemetry

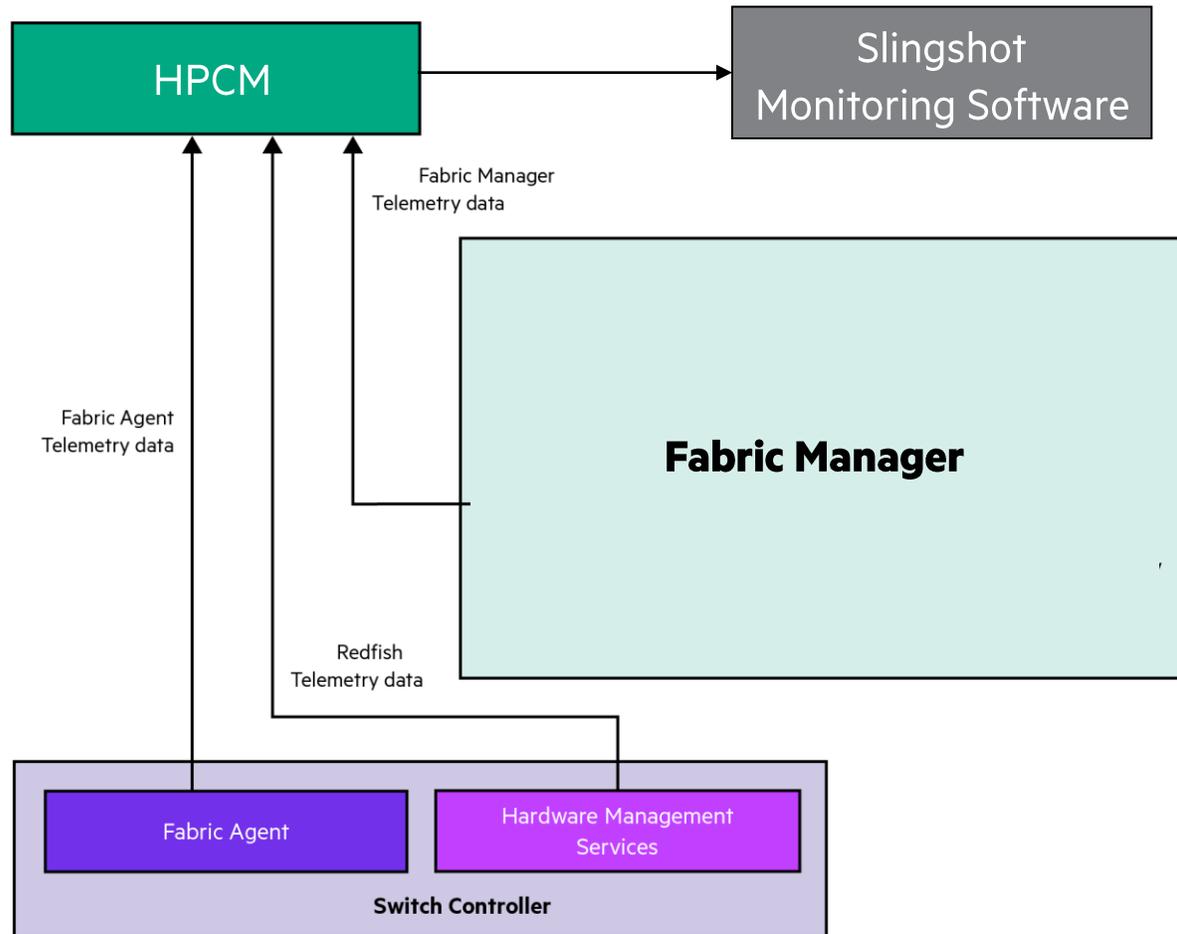

• Sources of Telemetry Data:

- *Fabric Manager (FM)*

- Generates health events when it detects an info, warning, or error condition

- *Switch Controller*

- Fabric Agent

- Collects ASIC specific metrics (i.e., performance counters, routing errors, port errors, etc)
- Generates health events when it detects info, warning, or error condition

- Hardware Management Services

- Periodically collects switch environmental metrics
- Generates switch environmental or components redfish events

Telemetry – Slingshot

Metrics

Metrics

- Fabric performance telemetry
- Fabric Critical Telemetry
- Switch hardware telemetry

90+ metrics/counters

Fabric Critical Telemetry

| Message Id | Metrics/Counters | Collection Rate | Definition |
|---------------|--------------------------|-----------------|--|
| PortErrors | pcs_corrected_cw | On config timer | The number of corrected FEC errors. |
| PortErrors | pcs_uncorrected_cw | On config timer | The number of uncorrected FEC errors. |
| RoutingErrors | frf_empty_route_uf_cntr | On config timer | An unexpected frame was received. The frame was dropped. |
| RoutingErrors | frf_empty_route_cntr | On config timer | A received frame was not able to be routed. The frame was dropped. |
| RoutingErrors | frf_empty_route_edge_cnt | On config timer | A received frame, directed to an edge port, was dropped because none of the candidate ports |

Switch Hardware Telemetry

| Message Id | Metrics | Collection Rate | Definition |
|------------|------------------|-----------------|---|
| Current | PowerSupply | 1 Hz | The current, in Amps, of all power supplies. |
| Current | VoltageRegulator | 1 Hz | The current, in Amps, of a voltage regulator. |
| Power | PowerSupply | 1 Hz | The input or output power, in Watts, from a power supply. |

Telemetry – Slingshot

CrayFabricHealth events

Events

- [CrayFabricHealth events](#)
- [ASIC error flag events](#)
- [Port Error Events](#)
- [Redfish events](#)
- [High speed network link events](#)

300+ events

CrayFabricHealth events

Fabric Health events are data generated by the Fabric Manager to report the health of the system. Fabric Health events are posted on health check occurrence - including when the error clears and a healthy state is reached. Generally, the Fabric Health events cover following areas:

- **Traffic:** Health events impacting passing traffic or caused by detecting issues in the data-plane of the Fabric
- **Configuration:** Health events impacting configuration of the Fabric policies or caused by detecting misconfigurations of the Fabric
- **Runtime:** Health events impacting the health and management state of the Fabric Manager itself, including resource or management network issues.
- **Security:** Health events indicating configuration issues related to security aspects of Fabric Manager.

With Health Monitors support, Health events can have custom categories and hence are not limited to the above mentioned categories.

Currently system has few default Health Monitors and they report events under following categories:

1. All ASIC errors are reported under “AsicErrorFlagHealth” category.
2. All Port error events are reported under “PortErrorEvent” category.

Health event includes an associated Severity:

- **Critical:** The impacted object or area is unhealthy and immediate action should be taken to repair or mitigate.
- **Warning:** The impacted object may be unhealthy, but the issue may not require immediate attention and may already be mitigated.
- **Info:** The impacted object has updated information, and no action is required.
- **Healthy:** A specific health check was performed on the object resulting in no detected error for that type.

Health events may be temporary due to an intermittent or operational change on the system. The Fabric Health engine maintains an active operational window:

- configurable by the administrator.
- which reports current active alerts and health issues affecting the fabric. The operational window is a moving window with a range of time, and refreshed on a frequent basis.

Events generated by the Fabric Manager and Fabric Agent on the Rosetta

- **Event Subcategory:** Defines the subcategory of the event
- **Runtime:** Includes fabric policy, telemetry, Fabric Manager host health, and Fabric Manager node file system health
- **Configuration:** Includes switch, port and fabric policies, and configuration
- **Traffic:** Includes port status, link status, and routing related issues
- **Security:** Includes authentication
- **Firmware:** Includes switch and ASIC firmware related issues
- **Event Name:** Defines the name of the event
- **Cause:** Possible cause for the event
- **Recommended Action:** Remediation action in case of failures

Telemetry – Slingshot

ASIC error flag events

Events

- [CrayFabricHealth events](#)
- [ASIC error flag events](#)
- [Port Error Events](#)
- [Redfish events](#)
- [High speed network link events](#)

ASIC error flag events

Health monitors are enabled by default for all ASIC error categories and also run for the `AsicErrorFlags.frf.empty_route` ASIC error.

The following events of type Critical or Warning are generated for ASIC errors and accessible under `/metrics` on the Rosetta switch.

Events are categorized as Critical or Warning health events based on the values set for the `warningHealthAlertLevel` and `criticalHealthAlertLevel` which in turn decides the type of monitor. The `warningHealthAlertLevel` and `criticalHealthAlertLevel` attributes for an event can be modified in `/fabric/asic-error-flag-policies/standard` to raise or lower the severity of a health alert. However, it is recommended to use the default values for these attributes.

NOTE: All of the error flag events in the following table meet the following criteria:

- **Subcategory:** CrayFabricHealth
- **Severity:** Critical or Warning
- **Service Name** RosettaAsicErrorFlagAgentsService
- **Name** `AsicErrorFlagHealth.critical.<CATEGORY>` **OR** `AsicErrorFlagHealth.warning.<CATEGORY>`
 - NOTE: Only the `<CATEGORY>` portion of the event name is shown in the table

Prefix location with:

| Frequency/Trigger | Name | Location |
|---|------------|--|
| Critical or Warning type EC_CRIT monitor for ASIC error flags belonging to EC_CRIT class as per the conditions specified in the healthmonitor rules | EC_CRIT | <code>/fabric/health-monitors/asic-errors-general-critical-ec_crit</code> <code>/fabric/health-monitors/asic-errors-general-warning-ec_crit</code> |
| Critical or Warning type EC_UNCOR_S monitor for ASIC error flags belonging to EC_UNCOR_S class as per the conditions specified in the healthmonitor rules | EC_UNCOR_S | <code>/fabric/health-monitors/asic-errors-general-critical-ec_uncor_s</code> <code>/fabric/health-monitors/asic-errors-general-warning-ec_uncor_s</code> |

Telemetry – Slingshot

Redfish events

Events

- [CrayFabricHealth events](#)
- [ASIC error flag events](#)
- [Port Error Events](#)
- [Redfish events](#)
- [High speed network link events](#)

Redfish events

This section includes information for interpreting Redfish events generated by the Redfish APIs.

The switch controller implements a Redfish endpoint, which conforms to the standard Redfish API. Refer to the following [external documentation](#) for more information.

In addition to standard events, HPE implements the OEM extensions outlined in the following subsections.

Cray Uefi

Cray Uefi Message Registry

Description

| | |
|-----------------------|---|
| FatalUefiError | Indicates that a critical error was encountered. |
| NonFatalUefiError | Indicates that a non-fatal error was encountered. |
| CorrectableUefiError | Indicates that a correctable error was encountered. |
| PreviousBootUefiError | Indicates that a previous boot error was encountered. |
| SMMPingTimeout | The SMMP ping timed out |
| GeneralUefiError | Indicates that a UEFI error was encountered. |

Cray Alert

Cray Alert Message Registry

Description

| | |
|---------------------------|---|
| ResourcePowerStateChanged | The power state of resource %1 has changed to type %2. The state types shall be used from Resource.PowerState. |
| HardwareFailoverDetected | The primary hardware associated with a resource has failed. A backup device has been enabled to allow normal operation. |

Cray Alert Message Registry

Description

| | |
|-----------------------------------|--|
| HardwareDegradationDetected | A hardware resource is operational but is functioning at a reduced capacity. |
| HardwareDegradationCleared | A hardware resource has regained full operational capacity. |
| HardwareFailureDetected | A hardware resource has failed. The system is still operational but immediate action should be taken to avoid downtime. |
| HardwareDisconnectDetected | A hardware resource has been disconnected. The system is still operational but immediate action should be taken to avoid downtime. |
| HardwareDisconnectCleared | A hardware resource has been reconnected. |
| HardwareEmergencyPowerOffDetected | A hardware resource has powered down to protect itself from damage. |

PowerFailureDetected

Indicates that a power failure has occurred.

HsnTransceiverRemoved

Indicates that a high-speed-network transceiver was removed or powered off.

HsnTransceiverInstalled

Indicates that a high-speed-network transceiver is installed.

HsnTransceiverMgmtError

Indicates the management interface of a high-speed-network transceiver is in error.

HsnTransceiverEPO

Indicates a high-speed-network transceiver emergency power off (EPO) event.

HsnLinkUpDetected

Indicates that a high-speed-network link changed state to up.

HsnLinkDownDetected

Indicates that a high-speed-network link changed state to down.

HsnLinkErrorDetected

Indicates that a high-speed-network link changed state to error.

Telemetry – Slingshot

High speed network link & port error events

Events

- [CrayFabricHealth events](#)
- [ASIC error flag events](#)
- [Port Error Events](#)
- [Redfish events](#)
- [High speed network link events](#)

High speed network link events

Asynchronous link-events are posted by the agent when there is a change in state of a link. The following link-events are posted.

Supported events

The following event types are supported:

- Link-Status Up: Link has met quality standard and is in use, included in the routing tables.
- Link-Status Down: Link is enabled but has not come up, or went down from operational, includes a description of why the link failed.
- Link-Status Error: Link has encountered an error while trying to come up or while in operation.
- Link Flap: A link went down and back up within a short period of time. Includes a description of why the link failed.

Port state information

Port state information including MAC, MTU, Type, SubType, and Speed is posted in the Link-Status Up event:


- MTU: Maximum Transmission Unit (MTU) is the maximum frame size supported by the interface.
- MAC: MAC address of the interface.
- Type: Type information for the interface, such as Ethernet or Fabric.
- SubType: SubType information of the interface, such as Edge, local, or global.
- Speed: Speed of the interface in Mbps.

Port error events

Slingshot port error events are generated by the switch agents for critical port errors reported by Rosetta hardware. These errors are posted on occurrence.

| Message Id | Metrics/Counters | Collection Rate | Definition |
|----------------|---------------------------|-----------------|--|
| PortErrorEvent | pcs_corrected_cw | On occurrence | Posted when the number of corrected FEC errors exceeds a threshold. |
| PortErrorEvent | pcs_uncorrected_cw | On occurrence | Posted when the number of uncorrected FEC errors exceeds a threshold. |
| PortErrorEvent | pcs_llr_replay | On occurrence | Posted when the number of llr_tx_replay_event and llr_rx_replay_event errors exceeds a threshold. |
| PortErrorEvent | ibuf_full | On occurrence | Posted when the number of ibuf_full errors exceeds a threshold. |
| PortErrorEvent | ageq_stall_obuf | On occurrence | Indicates excessive blocking on the egress port, This may be caused by a very high error rate on the link preventing transmission through the LLR. Could be caused by bad configuration. |
| PortErrorEvent | ageq_stall_ibuf_vc_0[0-3] | On occurrence | Indicates the link partner's buffer space is not being released. Likely indicates a critical problem on another Rosetta. Could be caused by very high levels of network congestion caused by a wide uncontrolled incast. |

Slingshot Monitoring Architecture and Deployment Model

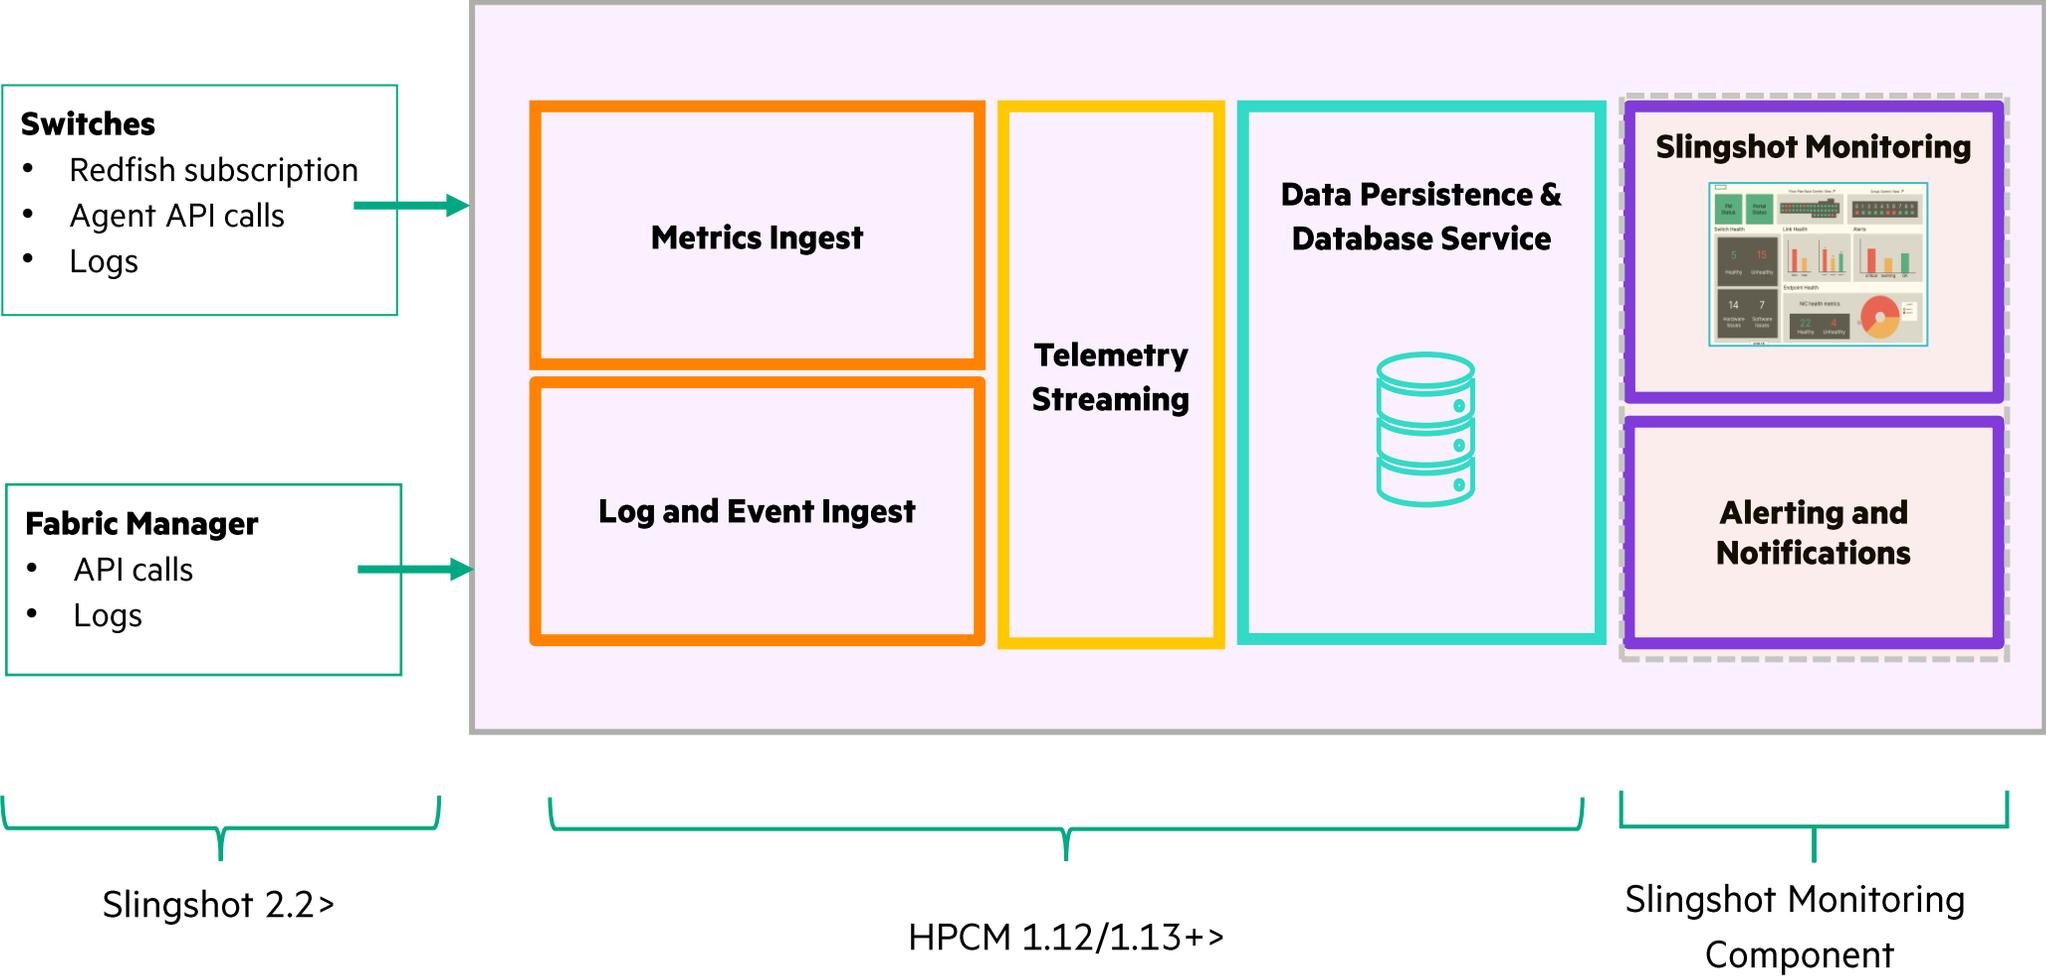

Customer Struggles, Needs, and Wants

Pain Points

- Immense amount of manual processing of data to draw insights
- Several engineering hours invested in root cause analysis of issues
- Uncertainty about what HPE Slingshot components to monitor leads to blind spots and inefficiencies
- Building custom diagnostic tools (via CLI) is slow and time-consuming process, delaying issue resolution and increasing operational overhead

User Considerations

- Is my fabric functional?
- How many switches are healthy and unhealthy?
- How many fabric and end ports are online and offline?
- Are there issues with the links? Any ASIC errors?

Outcomes

- Quickly summarize and synthesize insights in real-time
- Reduce the manual time taken for the root cause analysis
- Improve the overall utilization of their system through data-driven decision-making

Target User

- HPC / AI customers using Slingshot
- System and network administrators




Save debug time



Machine Utilization



Prevent downtime



Reduce Total Cost of ownership



Welcome to Grafana

Email or username

Password



Log in

[Forgot your password?](#)



FM Status - fmn1 ↗

fmn1 **HEALTHY**

FM Status - fmn2 ↗

fmn2 **HEALTHY**

Total Unhealthy Links ↗

1


Unhealthy Links by Type ↗



Total Unhealthy Switches ↗

9


Switch Group Health ↗




Active Alerts

7

Active Alerts by Severity ↗

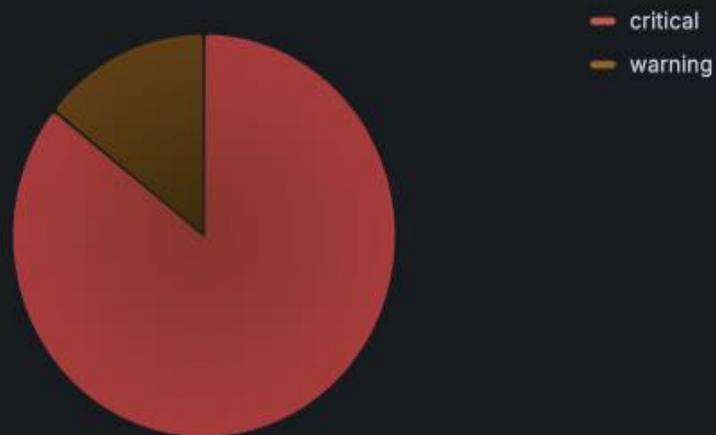

Alerts by Component Type ↗

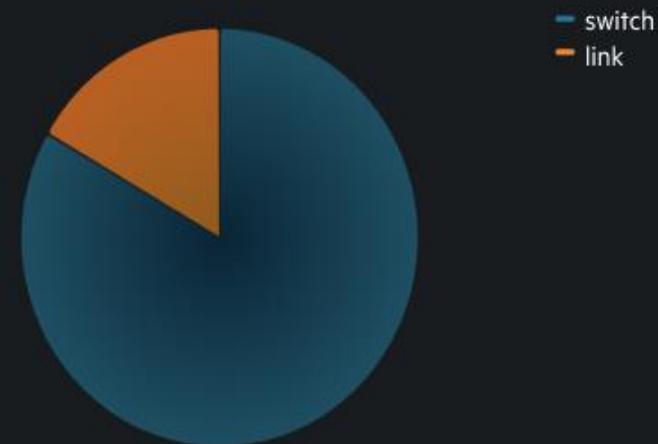

Silenced Alerts

0



Add ▾

Share



Last 15 minutes ^



Absolute time range

From

now-15m



To

now



Apply time range

It looks like you haven't used this time picker before. As soon as you enter some time intervals, recently used intervals will appear here.

[Read the documentation](#) to find out more about how to enter custom time ranges.

Q Search quick ranges

Last 5 minutes

Last 15 minutes

Last 30 minutes

Last 1 hour

Last 3 hours

Last 6 hours

Last 12 hours

Last 24 hours

Last 2 days

Browser Time United States, PDT

UTC-07:00

Change time settings



Q Search or jump to...

ctrl+k




Home > Dashboards > HPE Slingshot Monitoring Software > Links Overview ☆



Share

Last 15 minutes

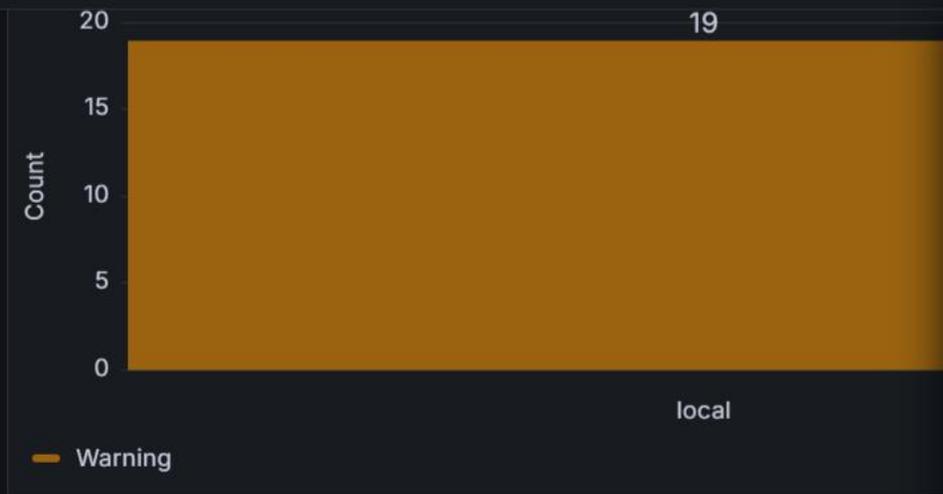

Filter by values: T_T

Contains Contains

LinkDown =

LinkUp !=


None >

Select all >=

Add all displayed values to the filter <

Expression <=

Ok Cancel

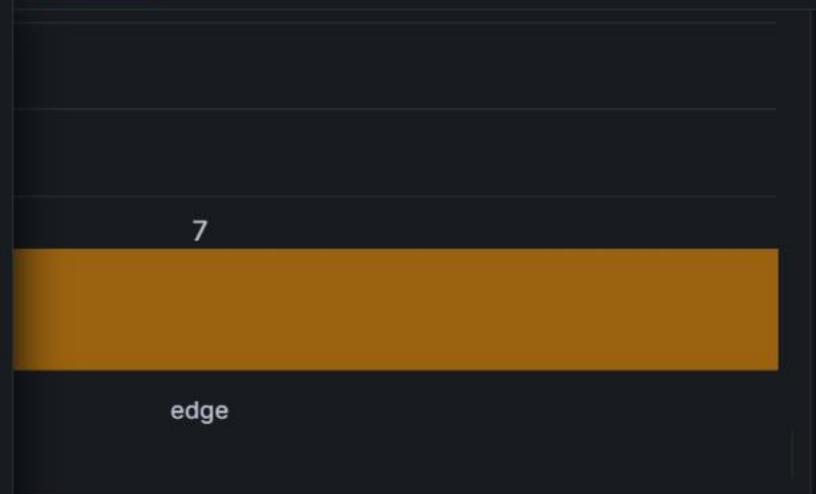

Link Health

| Port | Neighbor | Type | State | Reason | Max Event Severity | Speed | Switch |
|-----------------|-----------------|-------|----------|---------------|--------------------|--------|------------|
| x3000c0r38j29p1 | x3000c0r39j30p1 | local | LinkDown | pcs alignment | Warning | 200000 | x3000c0r38 |
| x3000c0r38j1p0 | x3000c0r39j2p0 | local | LinkUp | None | OK | 200000 | x3000c0r38 |
| x3000c0r38j31p1 | x3000c0r39j32p1 | local | LinkUp | None | OK | 200000 | x3000c0r38 |
| x3000c0r38j3p0 | x3000c0r39j4p0 | local | LinkUp | None | OK | 200000 | x3000c0r38 |



Fabric Manager fmn1 v

Cluster Role ↗

fmn1 ACTIVE

Cluster Role ↗

fmn2 STANDBY

CPU Utilization ⓘ

0.754%

Memory Utilization ⓘ

3%

Disk Utilization ⓘ

0.687%

All Fabric Manager Alerts

| Timestamp | Location ▼ | Alert Subcategory ▼ | Alert Name ▼ | Severity ▼ | Cause ▼ | Recommended Action ▼ |
|---------------------|----------------------------|---------------------|------------------------|------------|--------------------------------|-------------------------------|
| 2024-09-25 06:34:25 | http://[redacted]/fabric/r | Traffic | IntraGroupConnectivity | CRITICAL | Switch interconnectivity issue | Group 1 has no switch fully c |
| 2024-09-24 09:55:35 | http://[redacted]/fabric/r | Traffic | IntraGroupConnectivity | CRITICAL | Switch interconnectivity issue | Group 2 has no switch fully c |
| 2024-09-24 09:55:27 | http://[redacted]/fabric/r | Traffic | IntraGroupConnectivity | CRITICAL | Switch interconnectivity issue | Group 2 has no switch fully c |
| 2024-09-23 12:43:29 | http://[redacted]/fabric/r | Traffic | IntraGroupConnectivity | CRITICAL | Switch interconnectivity issue | Group 2 has no switch fully c |
| 2024-09-23 12:43:29 | http://[redacted]/fabric/r | Traffic | IntraGroupConnectivity | CRITICAL | Switch interconnectivity issue | Group 2 has no switch fully c |
| 2024-08-05 06:35:56 | http://[redacted]/fabric/r | Traffic | IntraGroupConnectivity | CRITICAL | Switch interconnectivity issue | Group 1 has no switch fully c |
| 2024-08-05 06:35:48 | http://[redacted]/fabric/r | Traffic | IntraGroupConnectivity | CRITICAL | Switch interconnectivity issue | Group 1 has no switch fully c |



Severity

All v

Component Type

All v

Active Alerts

4

Silenced Alerts

0

Active Alerts by Severity



Alerts by Component Type



| Timestamp | Name | Type | Severity | Component Type | Location | Message |
|-------------------------|--------------------------------|--------------------------|----------|----------------|-----------------|----------------------------|
| 2024-11-04 09:50:49.001 | Slingshot Link Health Critical | LinkErrors.MultiBitError | critical | link | x3000c0r38j2p0 | value=Recommend: Multi-bit |
| 2024-11-04 09:50:48.996 | Slingshot Link Health Critical | LinkErrors.MultiBitError | critical | link | x3000c0r38j14p1 | value=Recommend: Multi-bit |
| 2024-11-04 09:50:48.991 | Slingshot Link Health Critical | LinkErrors.MultiBitError | critical | link | x3000c0r38j14p0 | value=Recommend: Multi-bit |
| 2024-11-04 09:50:49.005 | Slingshot Link Health Critical | LinkErrors.MultiBitError | critical | link | x3000c0r38j2p1 | value=Recommend: Multi-bit |

New Silence

Start

Duration

End



Matchers Alerts affected by this silence

+

Custom matcher, e.g. `env="production"`

Creator

Comment


Preview Alerts

Create

Reset



Unhealthy Links by Type

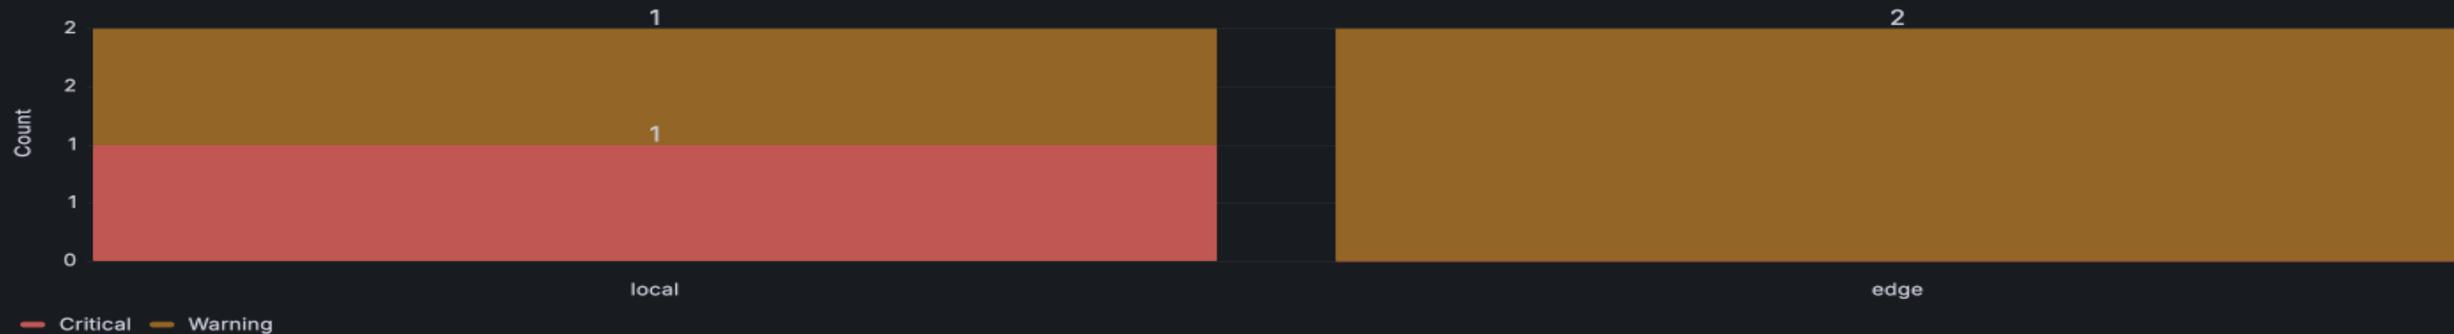

Link Health

| Port | Neighbor | Type | State | Reason | Max Event Severity | Speed | Switch |
|-----------------|------------------|-------|-----------|--------------------------|--------------------|--------|------------|
| x3000c0r38j3p1 | x3000c0r39j4p1 | local | LinkError | None | Critical | 200000 | x3000c0r38 |
| x3000c0r38j4p1 | x3000c0r39j3p1 | local | LinkUp | None | OK | 200000 | x3000c0r38 |
| x3000c0r38j2p1 | x3000c0r39j1p1 | local | LinkUp | None | OK | 200000 | x3000c0r38 |
| x3000c0r38j2p0 | x3000c0r39j1p0 | local | LinkUp | None | OK | 200000 | x3000c0r38 |
| x3000c0r38j14p1 | gaudi2-hsn3 | edge | LinkDown | uncorrectable MBE detect | OK | 200000 | x3000c0r38 |
| x3000c0r38j14p0 | gaudi2-hsn2 | edge | LinkDown | uncorrectable MBE detect | OK | 200000 | x3000c0r38 |
| x3000c0r38j15p0 | None | None | LinkDown | uncorrectable MBE detect | Warning | 200000 | x3000c0r38 |
| x3000c0r38j30p0 | x3000c0r39j29p0 | local | LinkUp | None | OK | 200000 | x3000c0r38 |
| x3000c0r39j31p1 | x3000c0r38j32p1 | local | LinkUp | None | OK | 200000 | x3000c0r39 |
| x3000c0r39j31p0 | x3000c0r38j32p0 | local | LinkUp | None | OK | 200000 | x3000c0r39 |
| x3000c0r39j29p0 | x3000c0r38j30p0 | local | LinkUp | None | OK | 200000 | x3000c0r39 |
| x3000c0r39j16p0 | x3000c0s18b4n0h1 | edge | LinkUp | None | OK | 200000 | x3000c0r39 |
| x3000c0r39j18p1 | x3000c0s18b1n0h1 | edge | LinkUp | None | OK | 200000 | x3000c0r39 |
| x3000c0r39j18p0 | x3000c0s18b2n0h1 | edge | LinkUp | None | OK | 200000 | x3000c0r39 |
| x3000c0r39j16p1 | x3000c0r38j29p1 | local | LinkUp | None | OK | 200000 | x3000c0r39 |

Link: x3000c0r38j4p1

Link Type: local



| | | | |
|----------------------|--------|----------------------|--------|
| Status: LinkDown | BER: 0 | Status: LinkDown | BER: 0 |
| Link Speed: 200 Gbps | FEC: 0 | Link Speed: 200 Gbps | FEC: 0 |

Link Status Reason / Recommended Action

Reason
pcs link down

Recommended Action
The signal quality between the two endpoints is poor and insufficient for PCS alignment. See: link hardware debug sequence.

Link Status Reason / Recommended Action

Reason
headshell absent

Recommended Action
Examine the jack and check for loose or missing cable headshell. If problem persists, see HPE Slingshot Troubleshooting guide.




HSN Link Events

| Timestamp | Event Type | Severity | Message | Cause |
|-------------------------|---------------------|----------|--------------------------------------|---------------|
| 2024-11-04 10:07:58.169 | HsnLinkDownDetected | Warning | The link x3000c0r38b0j4p1 has change | pcs link down |
| 2024-11-04 10:07:50.493 | HsnLinkUpDetected | OK | The link x3000c0r38b0j4p1 has change | None |
| 2024-11-04 10:07:04.687 | HsnLinkDownDetected | Warning | The link x3000c0r38b0j4p1 has change | pcs link down |

Link-Related Fabric Health Events

| Timestamp | Alert Category | Alert Name | Severity | Cause | Recommended Action |
|---------------------|----------------|--------------|----------|------------------------------------|-------------------------------------|
| 2024-08-20 10:50:35 | LinkErrors | cassinipause | CRITICAL | Port has entered error state cassi | Inspect the switch port. If issue p |
| 2024-08-20 09:50:31 | LinkErrors | cassinipause | CRITICAL | Port has entered error state cassi | Inspect the switch port. If issue p |
| 2024-08-20 07:50:23 | LinkErrors | cassinipause | CRITICAL | Port has entered error state cassi | Inspect the switch port. If issue p |
| 2024-08-20 06:50:19 | LinkErrors | cassinipause | CRITICAL | Port has entered error state cassi | Inspect the switch port. If issue p |
| 2024-08-20 05:50:15 | LinkErrors | cassinipause | CRITICAL | Port has entered error state cassi | Inspect the switch port. If issue p |
| 2024-08-20 04:50:11 | LinkErrors | cassinipause | CRITICAL | Port has entered error state cassi | Inspect the switch port. If issue p |

Switch Health



| Switch | IP | Status | ASIC Temperature | Max Event Severit | Firmware | Uptime | Group ID | Switch ID |
|------------|------------|--------|------------------|-------------------|-----------------------|----------------|----------|-----------|
| x3001c0r40 | 10.10.10.1 | up | 38 | OK | sc.2.2.0-72-slingshot | 38 days, 12:27 | 0 | 0 |
| x9000c1r1 | 10.10.10.2 | up | 39 | OK | sc.2.2.0-72-slingshot | 40 days, 5:16 | 1 | 0 |
| x9000c1r3 | 10.10.10.3 | up | 35 | OK | sc.2.2.0-72-slingshot | 21 days, 12:39 | 1 | 1 |
| x9000c1r5 | 10.10.10.4 | up | 34 | OK | sc.2.2.0-72-slingshot | 21 days, 12:39 | 1 | 2 |
| x9000c3r1 | 10.10.10.5 | up | 37 | OK | sc.2.2.0-72-slingshot | 42 days, 3:03 | 2 | 0 |
| x9000c3r3 | 10.10.10.6 | up | 38 | OK | sc.2.2.0-72-slingshot | 42 days, 3:03 | 2 | 1 |
| x9000c3r5 | 10.10.10.7 | up | 35 | OK | sc.2.2.0-72-slingshot | 41 days, 1:55 | 2 | 2 |
| x9000c3r7 | 10.10.10.8 | up | 35 | OK | sc.2.2.0-72-slingshot | 42 days, 3:03 | 2 | 3 |
| x9000c1r7 | 10.10.10.9 | down | | OK | None | None | 1 | 3 |

switch x3000c0r38

Local Port Health

Edge Port Health

Global Port Health

Firmware version:
sc.2.2.0-72-slingshot-release

IP address: **172.23.0.4** Uptime: **31 days 14:51**



Health Alerts

| Timestamp | Location | Alert Subcategory | Alert Name | Severity | Cause | Recommended Action |
|-------------------------|-----------------|-------------------|---------------|----------|--|--------------------|
| 2024-11-04 09:47:29.747 | x3000c0r38j2p0 | LinkErrors | MultiBitError | CRITICAL | Port has encountered multi-I Multi-bit errors are detected | |
| 2024-11-04 09:47:29.742 | x3000c0r38j2p1 | LinkErrors | MultiBitError | CRITICAL | Port has encountered multi-I Multi-bit errors are detected | |
| 2024-11-04 09:47:29.733 | x3000c0r38j14p1 | LinkErrors | MultiBitError | CRITICAL | Port has encountered multi-I Multi-bit errors are detected | |
| 2024-11-04 09:47:29.728 | x3000c0r38j14p0 | LinkErrors | MultiBitError | CRITICAL | Port has encountered multi-I Multi-bit errors are detected | |

HSN Link Events


| Timestamp | Jack | Event Type | Severity | Message | Cause |
|---------------------|-------|---------------------------------|----------|--|----------------------------|
| 2024-11-04 09:47:21 | j8p0 | CrayAlerts.1.0.HsnLinkDownDetec | Warning | The link x3000c0r38b0:j8p0 has uncorrectable MBE detected | uncorrectable MBE detected |
| 2024-11-04 09:47:21 | j8p1 | CrayAlerts.1.0.HsnLinkDownDetec | Warning | The link x3000c0r38b0:j8p1 has uncorrectable MBE detected | uncorrectable MBE detected |
| 2024-11-04 09:47:21 | j10p1 | CrayAlerts.1.0.HsnLinkDownDetec | Warning | The link x3000c0r38b0:j10p1 has uncorrectable MBE detected | uncorrectable MBE detected |
| 2024-11-04 09:47:21 | j10p0 | CrayAlerts.1.0.HsnLinkDownDetec | Warning | The link x3000c0r38b0:j10p0 has uncorrectable MBE detected | uncorrectable MBE detected |
| 2024-11-04 09:47:21 | j11p0 | CrayAlerts.1.0.HsnLinkDownDetec | Warning | The link x3000c0r38b0:j11p0 has uncorrectable MBE detected | uncorrectable MBE detected |
| 2024-11-04 09:47:21 | j5p1 | CrayAlerts.1.0.HsnLinkDownDetec | Warning | The link x3000c0r38b0:j5p1 has uncorrectable MBE detected | uncorrectable MBE detected |

Redfish Alerts

| Timestamp | Location | Alert Name | Severity | Message |
|-------------------------|------------|--------------------------|----------|---------------------------------------|
| 2024-11-04 09:47:21.439 | x3000c0r38 | HsnMultiBitErrorDetected | Critical | The link x3000c0r38b0:j8p1 has encoun |
| 2024-11-04 09:47:21.439 | x3000c0r38 | HsnMultiBitErrorDetected | Critical | The link x3000c0r38b0:j10p1 has encou |
| 2024-11-04 09:47:21.439 | x3000c0r38 | HsnMultiBitErrorDetected | Critical | The link x3000c0r38b0:j10p0 has encou |
| 2024-11-04 09:47:21.439 | x3000c0r38 | HsnMultiBitErrorDetected | Critical | The link x3000c0r38b0:j11p0 has encou |
| 2024-11-04 09:47:21.439 | x3000c0r38 | HsnMultiBitErrorDetected | Critical | The link x3000c0r38b0:j11p1 has encou |
| 2024-11-04 09:47:21.438 | x3000c0r38 | HsnMultiBitErrorDetected | Critical | The link x3000c0r38b0:j5p1 has encoun |

HPE Slingshot Monitoring Software: Summarizing and Synthesizing

- HPE Slingshot Monitoring Software is designed to generate real-time insights, offering a **quick and clear synthesis of the fabric's overall health**.
 - **Top-down view of fabric health** presents most critical info on homepage.
 - Drill-downs available for each section to **guide directed debugging**.
 - Links, ports, switches, and the fabric manager.
- The tool enables users to **reduce manual time taken for the root cause analysis** of the overall system and **improves overall utilization of the system** through data-driven decision-making
 - Machine down time is limited
- Users are provided the capabilities to
 - Quickly **summarize and synthesize insights** in real-time
 - **Reduce manual time** taken for the root cause analysis
 - **Improve overall utilization** of their system through data-driven decision-making

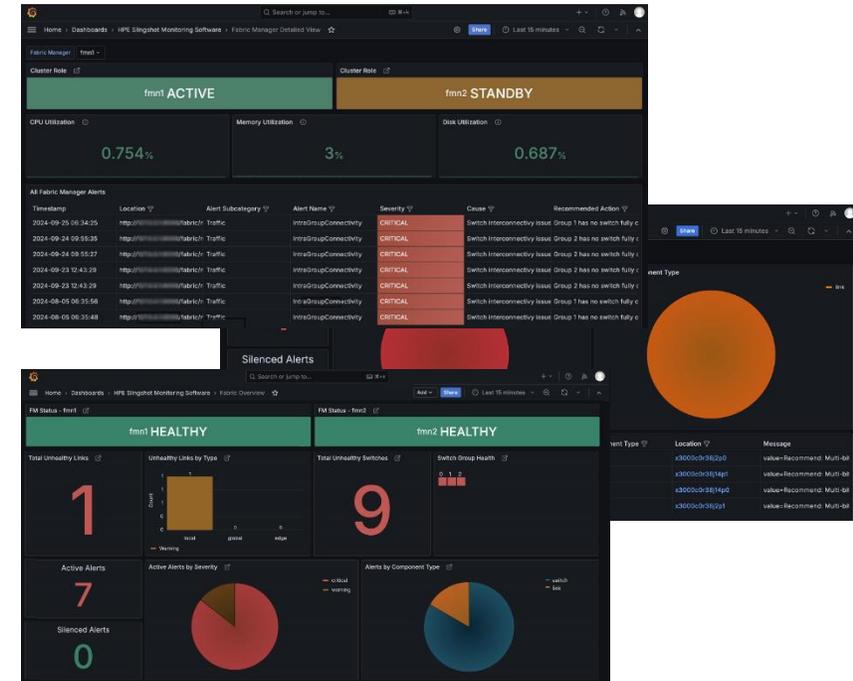

Thrive in the exascale era and beyond with HPE Slingshot Monitoring Software- HPE Delivers Today!

Slingshot Monitoring Software – Upcoming Features

New Alert Rule

Alert Rule Name: Placeholder

Event Metric

Enabled

Queries

A

Subcategory: Select item | Event Name: Select item

Cause: Select item | Switch(es): Select item

+ Add query

Expressions

C Threshold Reduce Math Alert Condition

Takes one or more time series returned from a query or an expression and checks if any of the series match the threshold condition.

Input: Select item | Evaluation: Select item | Value: Placeholder

+ Add expression

Evaluation interval: eg. 5m

Status

OK Warning Critical Unknown

Policies

Maintenance

Model: HPE_Slingshot_1_Top-of-Rack_Switch

Switch Ports

Link Types: E Edge, L Local, G Global, U Unconfigured

Health Statuses: OK / Healthy, Warning, Critical

Policies: Maintenance

There is 1 unhealthy hardware metric on this switch within the dashboard interval.

Link Detailed View

link: x3000c0r38j4p1

Link Type: local

Status: LinkUp LinkDown LinkError Unknown / Unconfigured

Policies: Maintenance

Port Speed: Full Speed Degraded Down Unknown / Unconfigured



Ready to Get Started with SMS? Here's What You Need to Know.

HPE Slingshot Monitoring Software

HPCM v 1.12/1.13+

OS (i.e., Suse)

Hardware (Server)

Hard Drives

- **HPE Slingshot Monitoring Software:**

- SMS has no SKU, any customer with existing HPCM 1.12/1.13 and above, can enable and start using Slingshot Monitoring.

- **Please Note:**

- SMS is available at no cost for Slingshot Customers.
- However, to collect Slingshot telemetry - the HPE Performance Cluster Manager (HPCM) software version 1.12 or higher needs to be available.
- For customers that don't want to use HPCM for cluster management (ex. have different Cluster Manager), or customers that do not wish to upgrade their existing HPCM, a standalone/monitoring version of HPCM can be enabled with purchase of only one HPCM license.

| | HPCM Customer | Non-HPCM Customer (ex CSM or other CM) |
|------------------------------|---|--|
| Use Case | Customer wants to enable SS monitoring and advanced telemetry on their new/existing HPCM. | Customer does not have HPCM and requires stand-alone SS monitoring and telemetry. |
| What to offer | <ul style="list-style-type: none"> • SMS • HPCM | <ul style="list-style-type: none"> • SMS • Instance of HPCM 1.12/1.13+ only to collect telemetry |
| Dependencies | <ul style="list-style-type: none"> • HPCM 1.12/1.13+ (VictoriaMetrics) • Slingshot 2.2 > | <ul style="list-style-type: none"> • HPCM 1.12/1.13+ (VictoriaMetrics) • Slingshot 2.2 > |
| Licensing requirement | <ul style="list-style-type: none"> • 1x HPCM license <ul style="list-style-type: none"> • SMS has no licensing • Linux license (Suse) | <ul style="list-style-type: none"> • Only 1 HPCM license to enable monitoring <ul style="list-style-type: none"> • SMS has no licensing • Linux license (Suse etc) |

*HPCM 1.12/1.13+ enables VictoriaMetrics Database required by SMS

Thank you!

Sahil Patel, *Technical Product Manager, HPE*
Contact: spatel@hpe.com

